


## Container and Bracket Dimensional & Electrical Data



|                               |                                                                                                                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Model                         | <b>SynPur LS3402</b>                                                                                                         |
| Capacity                      | 400 L/hr (880 lbs/hr)                                                                                                        |
| CO2 Requirement               | 99.5% Pure / 90 PSI                                                                                                          |
| Dimensions                    | A x B x C<br>600 x 400 x 400 mm<br>23.6 x 15.8 x 15.8 inches                                                                 |
| Clearances                    | Top 50 cm (20 inches)<br>Left 20 cm (8 inches)<br>Right 20 cm (8 inches)<br>Bottom 120 cm (48 inches) To allow for plumbing. |
| Weight                        | 25 kg<br>55 lbs                                                                                                              |
| Operating voltage             | 120 VAC/ 1P 60Hz +/-10%                                                                                                      |
| Power consumption             | 90 W                                                                                                                         |
| Usage                         | Indoor Use Only                                                                                                              |
| Altitude above mean sea level | Max 6,670 ft                                                                                                                 |
| Ambient temperature           | 7-35°C (45-95°F)                                                                                                             |
| Ambient humidity              | Max. 80 %, avoid condensation                                                                                                |

## Wiring Diagram

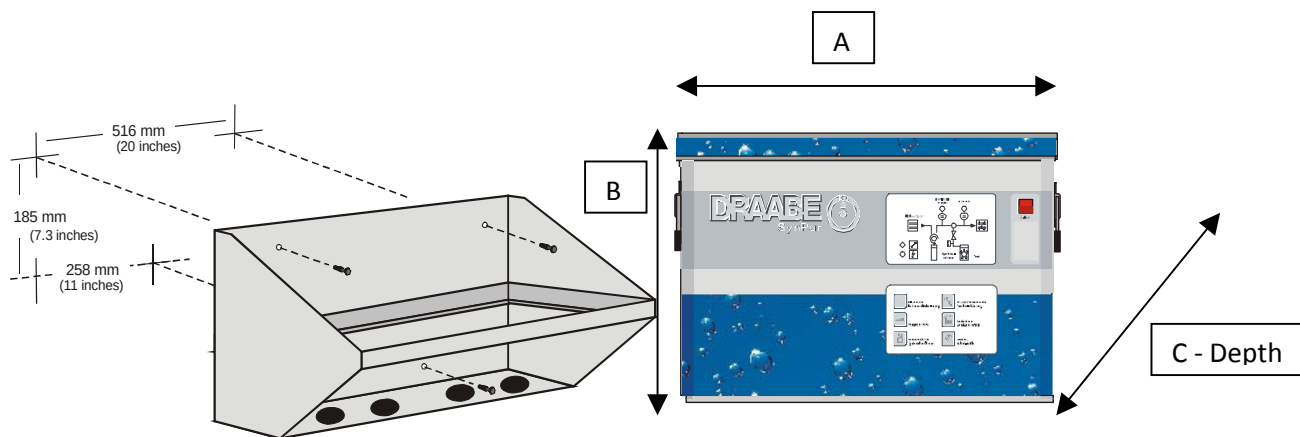